


- CE certified
- 50.000 h
- 5 year warranty
- A-label

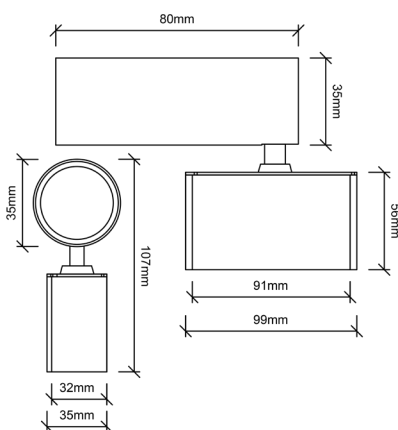

SPECIFICATIONS

SIZE	Ø 35*80
WEIGHT	0,35 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	Yes (95° - 360°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	5W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LIGHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	20° / 30° / 40° / 60°
LUMEN	400 Lm
CRI	> 90


PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
20°	170-728	170-732	170-736	20°	170-740	170-744	170-748
30°	170-729*	170-733	170-737	30°	170-741	170-745	170-749
40°	170-730*	170-734	170-738	40°	170-742	170-746	170-750
60°	170-731*	170-735	170-739	60°	170-743	170-747	170-751

*Available from stock

OGI TWIN

- CE certified
- 50.000 h
- 5 year warranty
- A-label

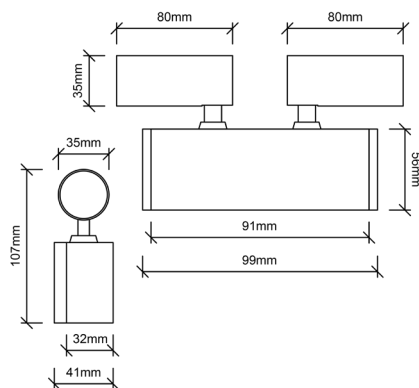

SPECIFICATIONS

SIZE	Ø 35*80
WEIGHT	0,55 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	Yes (95° - 360°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	2x5W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS


LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	20° / 30° / 40° / 60°
LUMEN	2x400 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
20°	170-752	170-756	170-760	20°	170-764	170-768	170-772
30°	170-753	170-757	170-761	30°	170-765	170-769	170-773
40°	170-754	170-758	170-762	40°	170-766	170-770	170-774
60°	170-755	170-759	170-763	60°	170-767	170-771	170-775

OGI PLUS

- CE CE certified
- 50.000 h
- 5 year warranty
- A-label

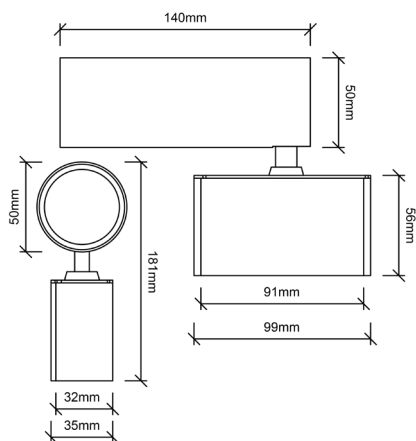

SPECIFICATIONS

SIZE	Ø 50*80
WEIGHT	0,48 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	Yes (95° - 360°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	10W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	18° / 24° / 36°
LUMEN	800 Lm
CRI	> 90

PRODUCTCODES


BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
18°	170-776	170-779	170-782	18°	170-785	170-788	170-791
24°	170-777	170-780	170-783	24°	170-786	170-789	170-792
36°	170-778*	170-781*	170-784	36°	170-787	170-790	170-793

*Available from stock

OGI PENDANT



- CE certified
- 50.000 h
- 5 year warranty
- A-label

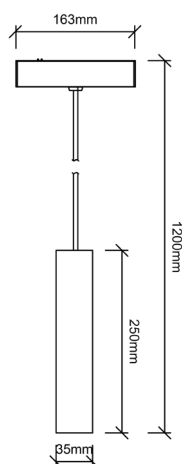

SPECIFICATIONS

SIZE	Ø 35*250
WEIGHT	0,62 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	5W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	20° / 30° / 40° / 60°
LUMEN	400 Lm
CRI	> 90

PRODUCTCODES


BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
20°	170-866	170-870	170-874	20°	170-878	170-882	170-886
30°	170-867*	170-871	170-875	30°	170-879	170-883	170-887
40°	170-868	170-872*	170-876	40°	170-880	170-884	170-888
60°	170-869*	170-873	170-877	60°	170-881	170-885	170-889

*Available from stock

OGI PENDANT



- CE certified
- 50.000 h
- 5 year warranty
- A-label

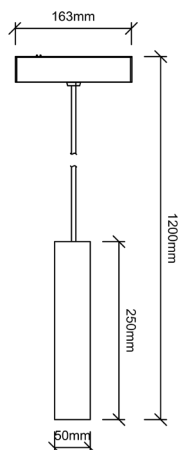

SPECIFICATIONS

SIZE	Ø 50*250
WEIGHT	0,65 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	10W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	18° / 24° / 36°
LUMEN	800 Lm
CRI	> 90


PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
18°	170-848	170-851	170-854	18°	170-857	170-860	170-863
24°	170-849	170-852	170-855	24°	170-858	170-861	170-864
36°	170-850*	170-853	170-856	36°	170-859	170-862	170-865

*Available from stock

SENDAI

- CE certified
- 50.000 h
- 5 year warranty
- A-label

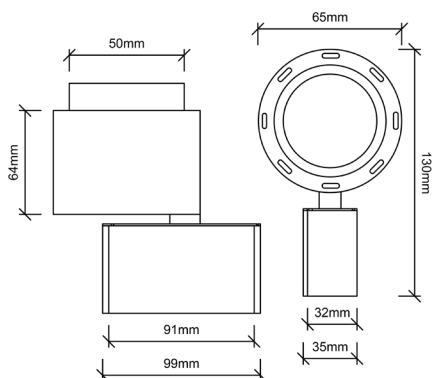

SPECIFICATIONS

SIZE	Ø 65*130
WEIGHT	0,49 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	Yes (95° - 360°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	8W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS


LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	10° / 20° / 30°
LUMEN	400 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
10°	170-794	170-797	170-800	10°	170-803	170-806	170-809
20°	170-795	170-798	170-801	20°	170-804	170-807	170-810
30°	170-796	170-799	170-802	30°	170-805	170-808	170-811

SENDAI

- CE certified
- 50.000 h
- 5 year warranty
- A-label

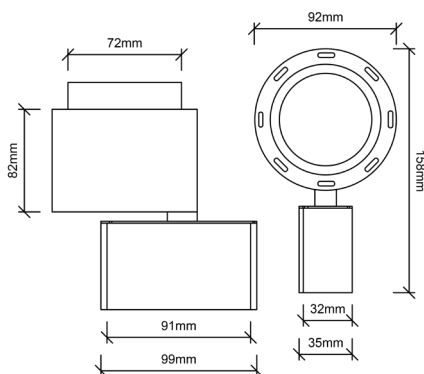

SPECIFICATIONS

SIZE	Ø 92*158
WEIGHT	0,69 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	Yes (95° - 360°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	15W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	10° / 20° / 30°
LUMEN	750 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
10°	170-812	170-815	170-818	10°	170-821	170-824	170-827
20°	170-813	170-816	170-819	20°	170-822	170-825	170-828
30°	170-814	170-817	170-820	30°	170-823	170-826	170-829

NARA



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS

SIZE	Ø 50*50
WEIGHT	0,48 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	Yes (95° - 360°)
IP RATE	IP20

TECHNIC SPECS


INPUT VOLTAGE	24V (48V optional)
POWER	10W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	15° / 24° / 36°
LUMEN	800 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
15°	170-830	170-833	170-836	15°	170-839	170-842	170-845
24°	170-831	170-834	170-837	24°	170-840	170-843	170-846
36°	170-832	170-835	170-838	36°	170-841	170-844	170-847

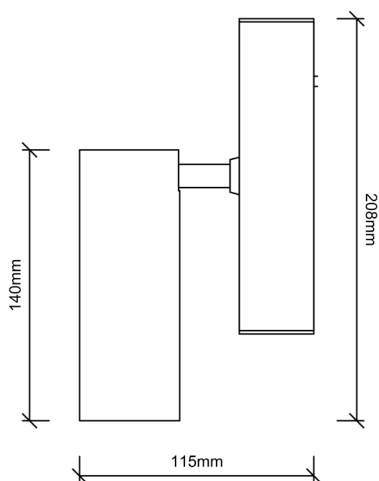

TAMA

- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label



SPECIFICATIONS


SIZE	Ø 150
WEIGHT	0,62 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	5W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LIGHT SPECS

LIGHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	360°
LUMEN	300 Lm
CRI	> 90

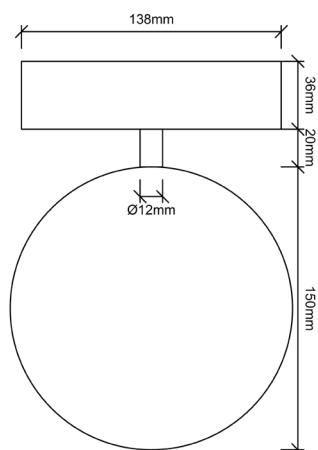


PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
360°	170-890	170-891	170-892	360°	170-893	170-894	170-895

NIKKO BEAM



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

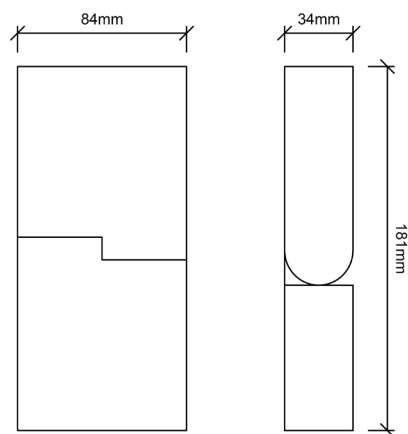

SPECIFICATIONS

SIZE	84*34*181
WEIGHT	0,5 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	Yes (95°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	4W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	12° / 34° / 48°
LUMEN	240 Lm
CRI	> 90


PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
12°	170-602	170-605	170-608	12°	170-611	170-614	170-617
34°	170-603	170-606	170-609	34°	170-612	170-615	170-618
48°	170-604	170-607	170-610	48°	170-613	170-616	170-619

NIKKO BEAM



- CE certified
- 50.000 h
- 5 year warranty
- A-label

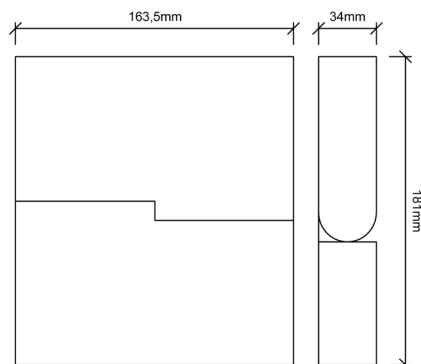

SPECIFICATIONS

SIZE	163,5*34*181
WEIGHT	0,89 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	Yes (95°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	8W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	12° / 34° / 48°
LUMEN	480 Lm
CRI	> 90


PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
12°	170-620	170-623	170-626	12°	170-629	170-632	170-635
34°	170-621	170-624	170-627	34°	170-630	170-633	170-636
48°	170-622	170-625	170-628	48°	170-631	170-634	170-637

NIKKO BEAM



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

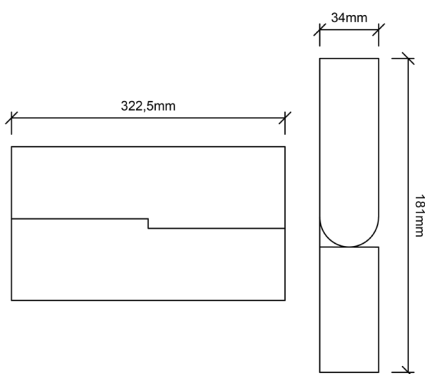

SPECIFICATIONS

SIZE	322,5*34*181
WEIGHT	1,6 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	Yes (95°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	16W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	12° / 34° / 48°
LUMEN	960 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
12°	170-638	170-641	170-644	12°	170-647	170-650	170-653
34°	170-639	170-642	170-645	34°	170-648	170-651	170-654
48°	170-640	170-643	170-646	48°	170-649	170-652	170-655

NIKKO FLOOD



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS


SIZE	84*34*181
WEIGHT	0,5 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	Yes (95°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	4W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	120°
LUMEN	200 Lm
CRI	> 90

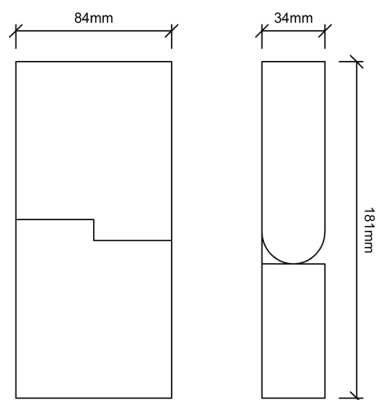

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
120°	170-656	170-657	170-658	120°	170-659	170-660	170-661

NIKKO FLOOD



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS


SIZE	163,5*34*181
WEIGHT	0,88 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	Yes (95°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	7W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	120°
LUMEN	400 Lm
CRI	> 90

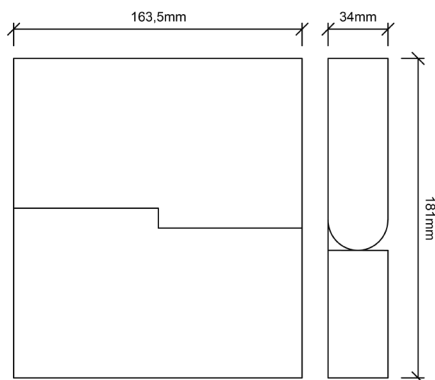


PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
120°	170-662	170-663	170-664	120°	170-665	170-666	170-667

NIKKO FLOOD



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

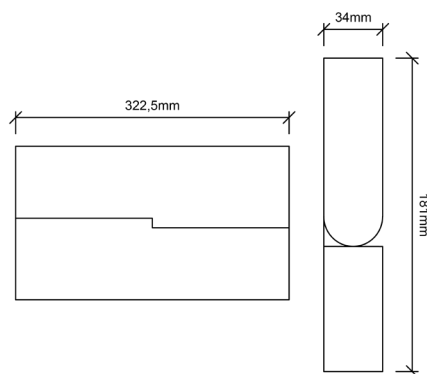

SPECIFICATIONS

SIZE	322,5*34*181
WEIGHT	1,6 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	Yes (95°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	16W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	120°
LUMEN	800 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
120°	170-668	170-669	170-670	120°	170-671	170-672	170-673

MITO BEAM



- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS


SIZE	83,5*34*55,5
WEIGHT	0,15 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	4W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	12° / 34° / 48°
LUMEN	240 Lm
CRI	> 90

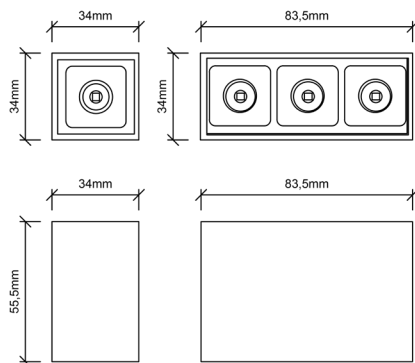

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
12°	170-518	170-521	170-524	12°	170-527	170-530	170-533
34°	170-519*	170-522	170-525	34°	170-528	170-531	170-534
48°	170-520	170-523*	170-526	48°	170-529*	170-532	170-535

*Available from stock

MITO BEAM



- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	163*34*55,5
WEIGHT	0,29 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	8W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic


LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	12° / 34° / 48°
LUMEN	480 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
12°	170-536	170-539	170-542	12°	170-545	170-548	170-551
34°	170-537*	170-540	170-543	34°	170-546*	170-549	170-552
48°	170-538	170-541	170-544	48°	170-547	170-550	170-553


*Available from stock

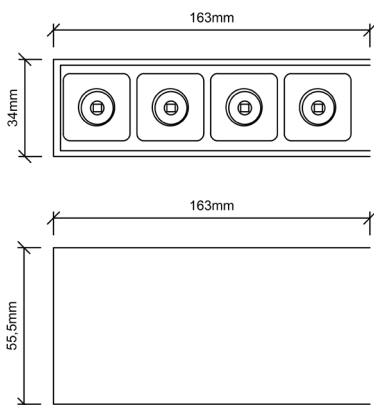

MITO BEAM



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

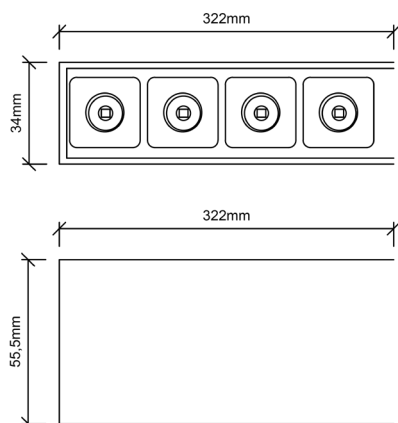

SPECIFICATIONS

SIZE	322*34*55,5
WEIGHT	0,51 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	16W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	12° / 34° / 48°
LUMEN	960 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
12°	170-554	170-557	170-560	12°	170-563	170-566	170-569
34°	170-555*	170-558*	170-561	34°	170-564*	170-567	170-570
48°	170-556*	170-559	170-562	48°	170-565*	170-568	170-571

*Available from stock

MITO FLOOD



- CE CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	83,5*34*55,5
WEIGHT	0,16 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS


INPUT VOLTAGE	24V (48V optional)
POWER	4W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	120°
LUMEN	200 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
120°	170-572	170-573	170-574	120°	170-575	170-576	170-577

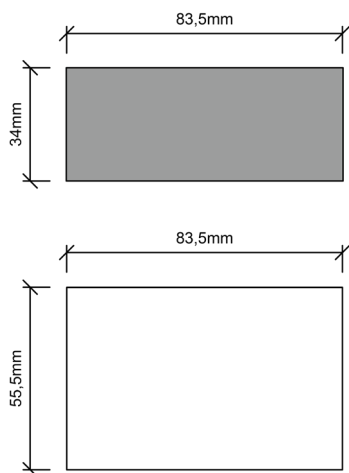

MITO FLOOD



-  CE certified
-  50.000 h
-  5 year warranty
-  A-label

SPECIFICATIONS

SIZE	163*34*55,5
WEIGHT	0,27 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS


INPUT VOLTAGE	24V (48V optional)
POWER	7W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS


LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	120°
LUMEN	350 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
120°	170-578	170-579	170-580	120°	170-581	170-582	170-583

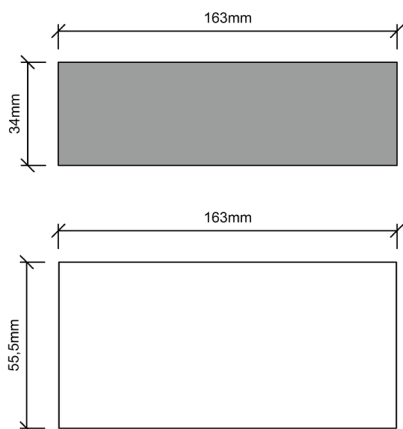

MITO FLOOD

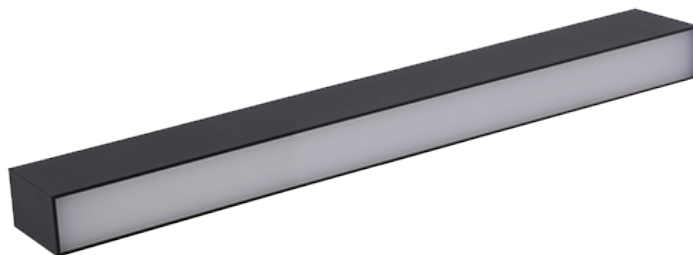

- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS

SIZE	322*34*55,5
WEIGHT	0,49 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS


INPUT VOLTAGE	24V (48V optional)
POWER	13W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS


LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	120°
LUMEN	650 Lm
CRI	> 90

PRODUCTCODES


BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
120°	170-584	170-585	170-586	120°	170-587	170-588	170-589

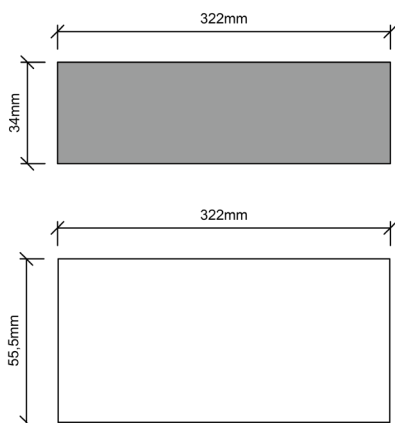

MITO FLOOD

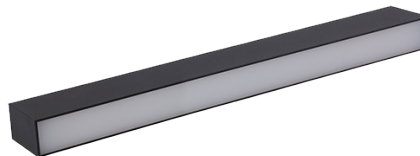

- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

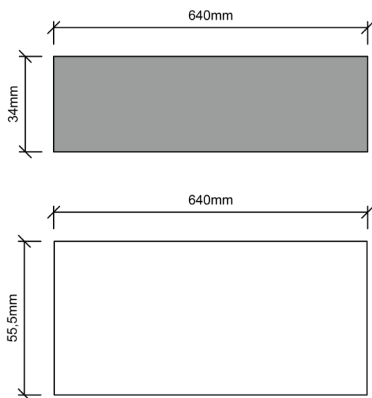

SPECIFICATIONS

SIZE	640*34*55,5
WEIGHT	0,95 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	26W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic


LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	120°
LUMEN	1300 Lm
CRI	> 90


PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
120°	170-590	170-591	170-592	120°	170-593	170-594	170-595

MITO FLOOD

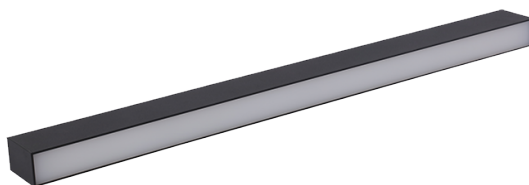

- CE CE certified
- 50.000 h
- ✓ 5 year warranty
- A A-label

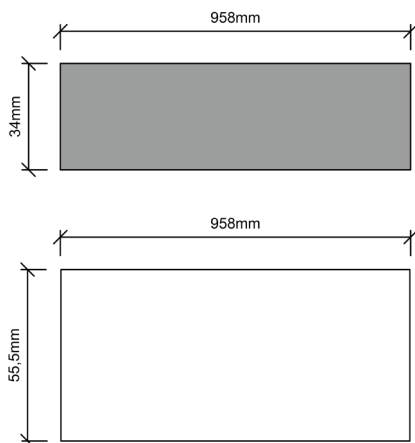

SPECIFICATIONS

SIZE	958*34*55,5
WEIGHT	1,4 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	39W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	120°
LUMEN	1950 Lm
CRI	> 90


PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
120°	170-596	170-597	170-598	120°	170-599	170-600	170-601

KOYA WASH



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

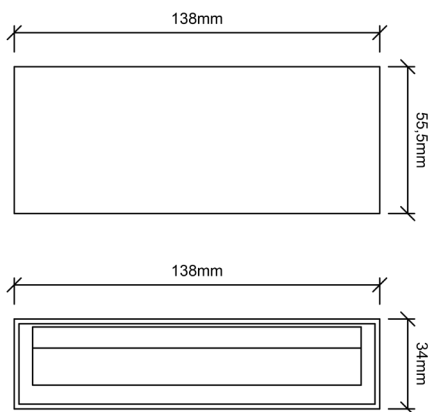

SPECIFICATIONS

SIZE	138*34*55,5
WEIGHT	0,27 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	8W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	120°
LUMEN	400 Lm
CRI	> 90



PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
120°	170-674	170-675	170-676	120°	170-676	170-677	170-678

KOYA WASH



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label



SPECIFICATIONS

SIZE	270*34*55,5
WEIGHT	0,49 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	16W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	120°
LUMEN	800 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
120°	170-680	170-681	170-682	120°	170-683	170-684	170-685

KOYA WASH



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS


SIZE	400*34*55,5
WEIGHT	0,63 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	24W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	120°
LUMEN	1200 Lm
CRI	> 90

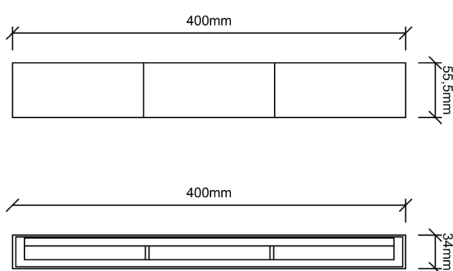

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
120°	170-686	170-687	170-688	120°	170-689	170-690	170-691

KOYA BEAM



- CE CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS


SIZE	322,5*34*183
WEIGHT	0,73 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	12W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	12° / 34° / 48°
LUMEN	960 Lm
CRI	> 90

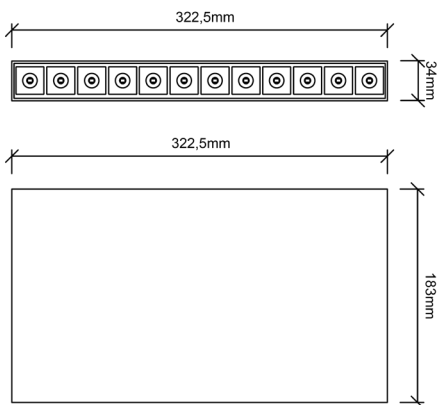

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
12°	170-710	170-713	170-716	12°	170-719	170-722	170-725
34°	170-711	170-714	170-717	12°	170-720	170-723	170-726
48°	170-712	170-715	170-718	12°	170-721	170-724	170-727

KOYA FLOOD



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS


SIZE	322,5*34*183
WEIGHT	0,71 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	16W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	120°
LUMEN	720 Lm
CRI	> 90

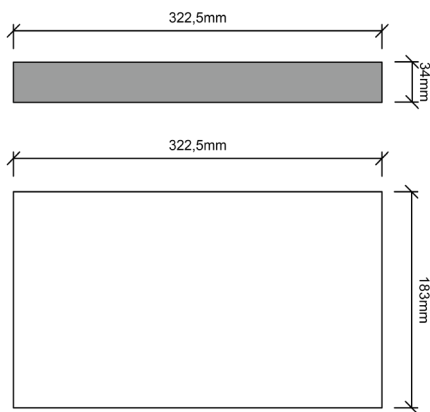

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
120°	170-692	170-695	170-698	120°	170-701	170-704	170-707

MAGNI TRACK SURFACE




- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	100*39*76
WEIGHT	1,83 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INSTALLATION	Surface / Pendant / Recessed
INPUT VOLTAGE	24V (48V optional)
INPUT CURRENT	8A Max
POWER	200W Max
POWER FACTOR	0.9
DIMMING	Triac / 1-10V / Dali
CONNECTION	Terminal Block

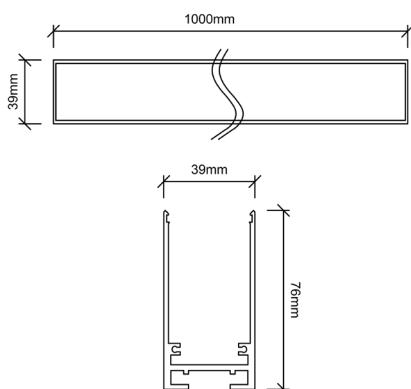

PRODUCTCODES

BLACK
170-001*

WHITE
170-002*

*Available from stock

MAGNI TRACK SURFACE




- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS

SIZE	200*39*76
WEIGHT	3,66 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INSTALLATION	Surface / Pendant / Recessed
INPUT VOLTAGE	24V (48V optional)
INPUT CURRENT	8A Max
POWER	200W Max
POWER FACTOR	0.9
DIMMING	Triac / 1-10V / Dali
CONNECTION	Terminal Block

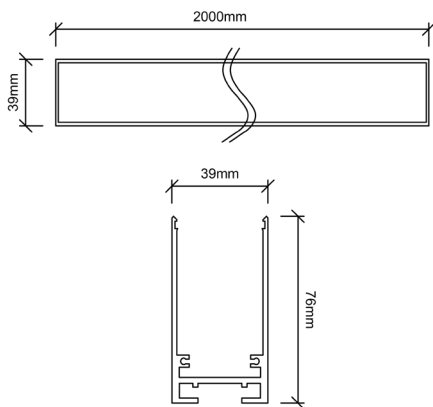

PRODUCTCODES

BLACK
170-003*


WHITE
170-004*

*Available from stock

MAGNI TRACK SURFACE



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

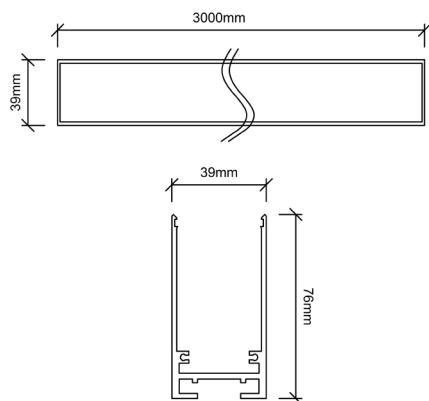

SPECIFICATIONS

SIZE	300*39*76
WEIGHT	5,49 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INSTALLATION	Surface / Pendant / Recessed
INPUT VOLTAGE	24V (48V optional)
INPUT CURRENT	8A Max
POWER	200W Max
POWER FACTOR	0.9
DIMMING	Triac / 1-10V / Dali
CONNECTION	Terminal Block

PRODUCTCODES

BLACK
170-005*

WHITE
170-006*

*Available from stock

MAGNI TRACK RECESSED




- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	100*39*76
WEIGHT	1,95 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INSTALLATION	Recessed
INPUT VOLTAGE	24V (48V optional)
INPUT CURRENT	8A Max
POWER	200W Max
POWER FACTOR	0.9
DIMMING	Triac / 1-10V / Dali
CONNECTION	Terminal Block

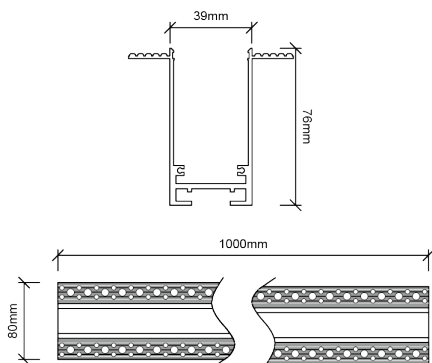

PRODUCTCODES

BLACK
170-007*

WHITE
170-008*

*Available from stock

MAGNI TRACK RECESSED




- CE CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	200*39*76
WEIGHT	3,9 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INSTALLATION	Recessed
INPUT VOLTAGE	24V (48V optional)
INPUT CURRENT	8A Max
POWER	200W Max
POWER FACTOR	0.9
DIMMING	Triac / 1-10V / Dali
CONNECTION	Terminal Block

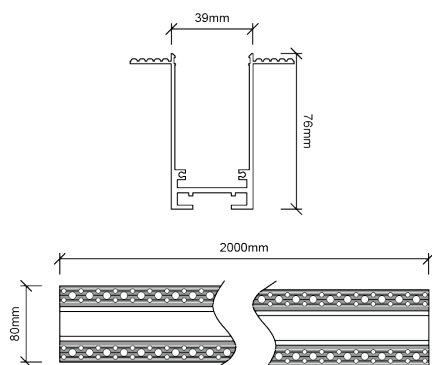

PRODUCTCODES

BLACK
170-009*

WHITE
170-010*

*Available from stock

MAGNI TRACK RECESSED




- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS

SIZE	300*39*76
WEIGHT	5,7 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INSTALLATION	Recessed
INPUT VOLTAGE	24V (48V optional)
INPUT CURRENT	8A Max
POWER	200W Max
POWER FACTOR	0.9
DIMMING	Triac / 1-10V / Dali
CONNECTION	Terminal Block

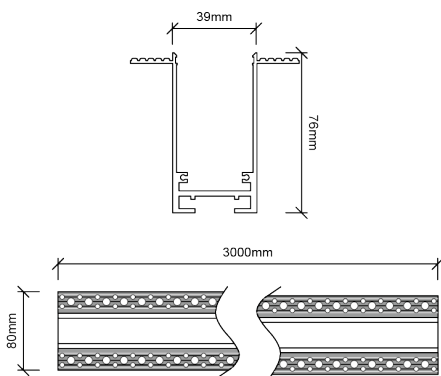


PRODUCTCODES

BLACK	WHITE
170-011*	170-012*

*Available from stock

OGI CURVE

- CE CE certified
- 50.000 h
- 5 year warranty
- A-label

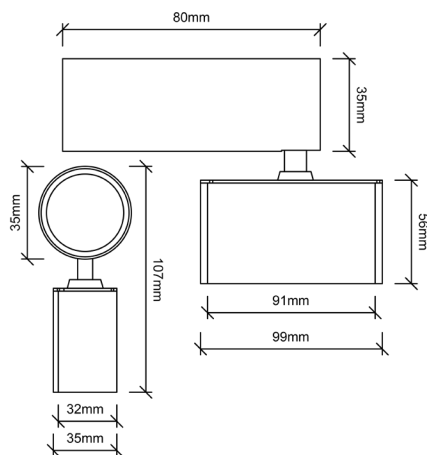

SPECIFICATIONS

SIZE	Ø 35*80
WEIGHT	0,35 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	Yes (95° - 360°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	5W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS


LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	20° / 30° / 40° / 60°
LUMEN	400 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
20°	171-142	171-146	171-150	20°	171-154	171-158	171-162
30°	171-143	171-147	171-151	30°	171-155	171-159	171-163
40°	171-144	171-148	171-152	40°	171-156	171-160	171-164
60°	171-145	171-149	171-153	60°	171-157	171-161	171-165
BRASS	2700K	3000K	4000K				
20°	171-321	171-325	171-329				
30°	171-322	171-326	171-330				
40°	171-323	171-327	171-331				
60°	171-324	171-328	171-332				

OGI PLUS CURVE

- CE certified
- 50.000 h
- 5 year warranty
- A-label

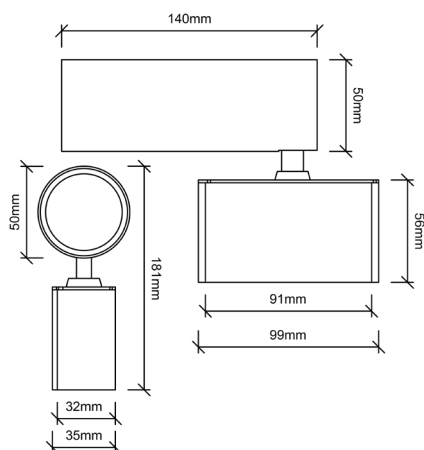

SPECIFICATIONS

SIZE	Ø 50*140
WEIGHT	0,48 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	Yes (95° - 360°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	10W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS


LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	18° / 24° / 36°
LUMEN	800 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
18°	171-190	171-193	171-196	18°	171-199	171-202	171-205
24°	171-191	171-194	171-197	24°	171-200	171-203	171-206
36°	171-192	171-195	171-198	36°	171-201	171-204	171-207
BRASS	2700K	3000K	4000K				
18°	171-345	171-348	171-351				
24°	171-346	171-349	171-352				
36°	171-347	171-350	171-353				

OGI TWIN CURVE

- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

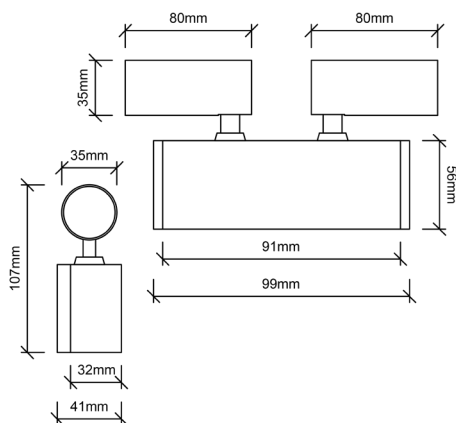

SPECIFICATIONS

SIZE	Ø 35*80
WEIGHT	0,55 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	Yes (95° - 360°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	2x5W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS


LIGHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	20° / 30° / 40° / 60°
LUMEN	2x400 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
20°	171-166	171-170	171-174	20°	171-178	171-182	171-186
30°	171-167	171-171	171-175	30°	171-179	171-183	171-187
40°	171-168	171-172	171-176	40°	171-180	171-184	171-188
60°	171-169	171-173	171-177	60°	171-181	171-185	171-189
BRASS	2700K	3000K	4000K				
20°	171-333	171-337	171-341				
30°	171-334	171-338	171-342				
40°	171-335	171-339	171-343				
60°	171-336	171-340	171-344				

SENDAI CURVE

- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

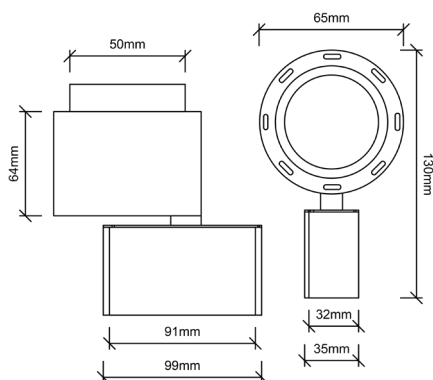

SPECIFICATIONS

SIZE	Ø 65*130
WEIGHT	0,49 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	Yes (95° - 360°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	8W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	10° / 20° / 30°
LUMEN	400 Lm
CRI	> 90


PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
10°	171-208	171-211	171-214	10°	171-217	171-220	171-223
20°	171-209	171-212	171-215	20°	171-218	171-221	171-224
30°	171-210	171-213	171-216	30°	171-219	171-222	171-225

BRASS	2700K	3000K	4000K
10°	171-354	171-357	171-360
20°	171-355	171-358	171-361
30°	171-356	171-359	171-362

SENDAI CURVE

- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

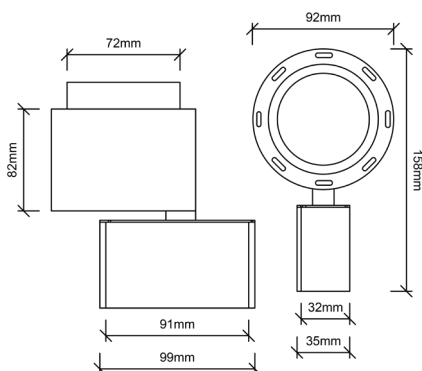

SPECIFICATIONS

SIZE	Ø 92*158
WEIGHT	0,69 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	Yes (95° - 360°)
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	15W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	10° / 20° / 30°
LUMEN	750 Lm
CRI	> 90

PRODUCTCODES


BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
10°	171-226	171-229	171-232	10°	171-235	171-238	171-241
20°	171-227	171-230	171-233	20°	171-236	171-239	171-242
30°	171-228	171-231	171-234	30°	171-237	171-240	171-243

BRASS	2700K	3000K	4000K
10°	171-363	171-366	171-369
20°	171-364	171-367	171-370
30°	171-365	171-368	171-371

OGI PENDANT CURVE



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

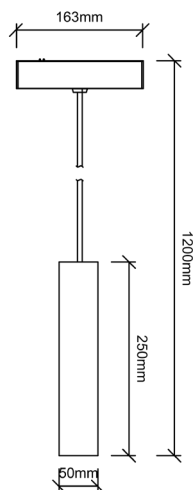

SPECIFICATIONS

SIZE	Ø 50*250
WEIGHT	0,65 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	10W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	18° / 24° / 36°
LUMEN	800 Lm
CRI	> 90

PRODUCTCODES


BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
18°	171-244	171-247	171-250	18°	171-253	171-256	171-259
24°	171-245	171-248	171-251	24°	171-254	171-257	171-260
36°	171-246	171-249	171-252	36°	171-255	171-258	171-261

BRASS	2700K	3000K	4000K
18°	171-372	171-375	171-378
24°	171-373	171-376	171-379
36°	171-374	171-377	171-380



OGI PENDANT CURVE

- CE certified
- 50.000 h
- 5 year warranty
- A-label

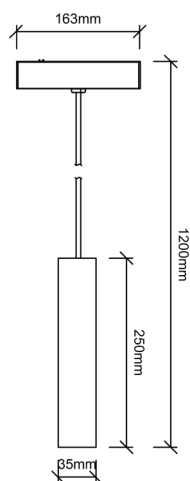

SPECIFICATIONS

SIZE	Ø 35*250
WEIGHT	0,62 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	5W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	20° / 30° / 40° / 60°
LUMEN	400 Lm
CRI	> 90


PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
20°	171-262	171-266	171-270	20°	171-274	171-278	171-282
30°	171-263	171-267	171-271	30°	171-275	171-279	171-283
40°	171-264	171-268	171-272	40°	171-276	171-280	171-284
60°	171-265	171-269	171-273	60°	171-277	171-281	171-285
BRASS	2700K	3000K	4000K				
20°	171-381	171-385	171-389				
30°	171-382	171-386	171-390				
40°	171-383	171-387	171-391				
60°	171-384	171-388	171-392				

TAMA CURVE



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

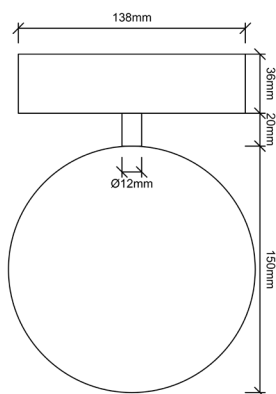

SPECIFICATIONS

SIZE	Ø 150
WEIGHT	0,62 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	5W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS


LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	360°
LUMEN	300 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
360°	171-286	171-287	171-288	360°	171-289	171-290	171-291
BRASS	2700K	3000K	4000K				
360°	171-392	171-393	171-394				

TAMA PENDANT

- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

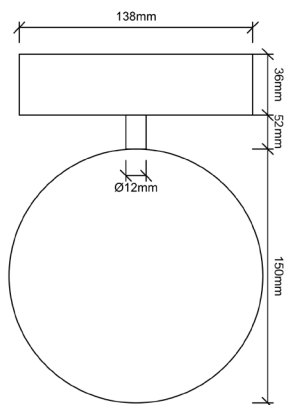

SPECIFICATIONS

SIZE	Ø 150
WEIGHT	0,62 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	5W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic


LICHT SPECS

LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K
BEAM ANGEL	360°
LUMEN	300 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	WHITE	2700K
360°	171-938	171-939	360°	171-965

MITO BEAM CURVE

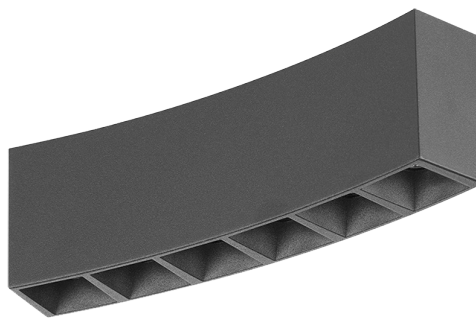

- CE CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS


SIZE	91*35*56
WEIGHT	0,15 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	4W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	12° / 24° / 48°
LUMEN	320 Lm
CRI	> 90

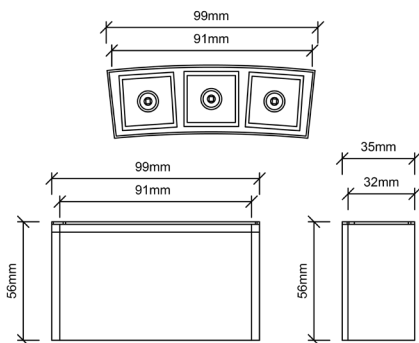


PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
12°	171-100	171-103	171-106	12°	171-109	171-112	171-115
24°	171-101	171-104	171-107	24°	171-110	171-113	171-116
48°	171-102	171-105	171-108	48°	171-111	171-114	171-117
BRASS	2700K	3000K	4000K				
12°	171-300	171-303	171-306				
24°	171-301	171-304	171-307				
48°	171-302	171-305	171-308				

MITO BEAM CURVE



- CE CE certified
- 50.000 h
- 5 year warranty
- A-label

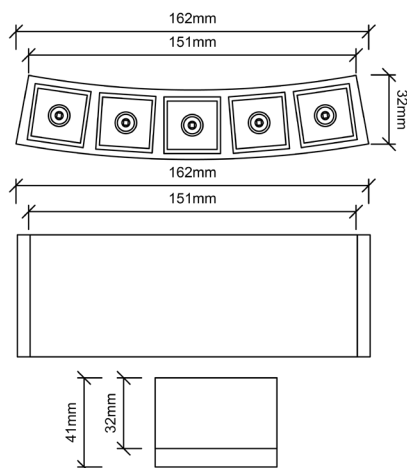

SPECIFICATIONS

SIZE	163*32*55,5
WEIGHT	0,29 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	8W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS


LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	12° / 24° / 48°
LUMEN	640 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
12°	171-118	171-104	171-108	12°	171-112	171-116	171-120
24°	171-101	171-105	171-109	24°	171-113	171-117	171-121
48°	171-102	171-106	171-110	48°	171-114	171-118	171-122

BRASS	2700K	3000K	4000K
12°	171-309	171-312	171-315
24°	171-310	171-313	171-316
48°	171-311	171-314	171-317

MITO FLOOD CURVE

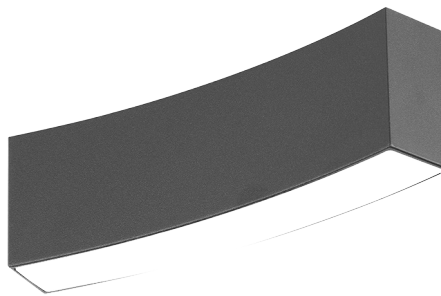

- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS

SIZE	162*32*56
WEIGHT	0,27 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS


INPUT VOLTAGE	24V (48V optional)
POWER	7W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Osram
LED TYPE	SMD
COLOR TEMPERATURE	2700K / 3000K / 4000K
BEAM ANGEL	120°
LUMEN	350 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	3000K	4000K	WHITE	2700K	3000K	4000K
120°	171-136	171-137	171-138	120°	171-139	171-140	171-141
BRASS	2700K	3000K	4000K				
120°	171-318	171-319	171-320				

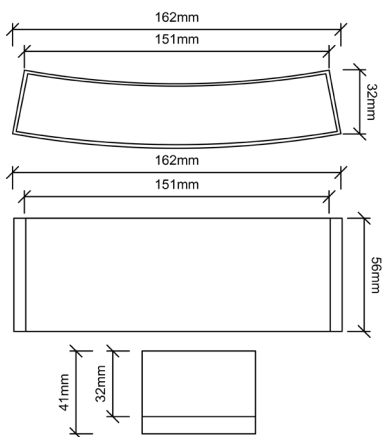

CURVY MAGNI TRACK - FULL




- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS

SIZE	Ø 900*39*76
WEIGHT	5,7 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INSTALLATION	Surface / Pendant
INPUT VOLTAGE	24V (48V optional)
INPUT CURRENT	8A Max
POWER	200W Max
POWER FACTOR	0.9
DIMMING	Triac / 1-10V / Dali
CONNECTION	Terminal Block

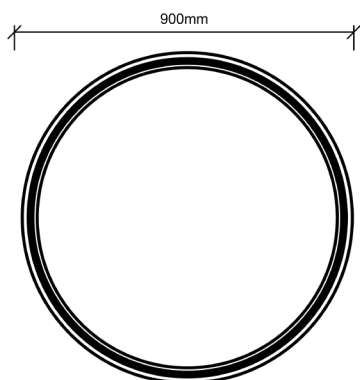

PRODUCTCODES

BLACK
171-001


WHITE
171-002

BRASS
171-395

CURVY MAGNI TRACK - 1/2



- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

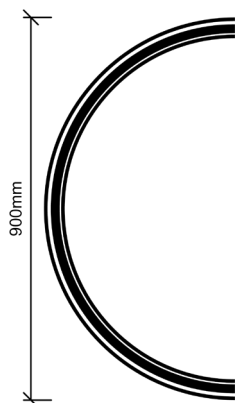

SPECIFICATIONS

SIZE	Ø 900*39*76
WEIGHT	2,85 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INSTALLATION	Surface / Pendant
INPUT VOLTAGE	24V (48V optional)
INPUT CURRENT	8A Max
POWER	200W Max
POWER FACTOR	0.9
DIMMING	Triac / 1-10V / Dali
CONNECTION	Terminal Block


PRODUCTCODES

BLACK 171-005	WHITE 171-006
BRASS 171-396	

CURVY MAGNI TRACK - 1/4



- CE CE certified
- 50.000 h
- ✓ 5 year warranty
- A A-label



SPECIFICATIONS

SIZE	Ø 900*39*76
WEIGHT	1,43 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INSTALLATION	Surface / Pendant
INPUT VOLTAGE	24V (48V optional)
INPUT CURRENT	8A Max
POWER	200W Max
POWER FACTOR	0.9
DIMMING	Triac / 1-10V / Dali
CONNECTION	Terminal Block

PRODUCTCODES

BLACK
171-010

WHITE
171-011

BRASS
171-397

CURVY MAGNI TRACK - 1/8




- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS

SIZE	Ø 900*39*76
WEIGHT	0,72 kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003) / Brass
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INSTALLATION	Surface / Pendant
INPUT VOLTAGE	24V (48V optional)
INPUT CURRENT	8A Max
POWER	200W Max
POWER FACTOR	0.9
DIMMING	Triac / 1-10V / Dali
CONNECTION	Terminal Block




PRODUCTCODES

BLACK
171-015

WHITE
171-016

BRASS
171-398

MAGNI TRACK PENDANT

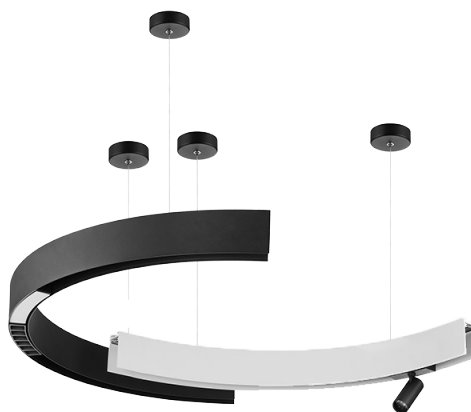


- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS

SIZE	Ø 80
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Pendant mounting kit for magnetic track.
--------------	--

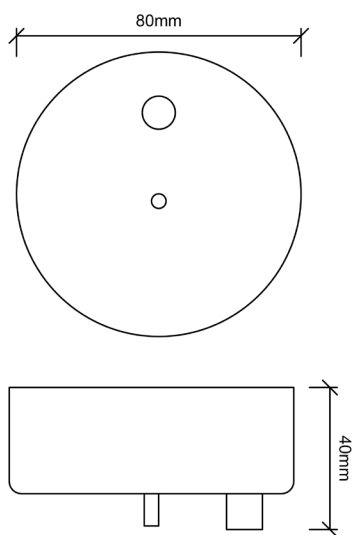

PRODUCTCODES

BLACK	WHITE
171-015	171-016

L-CORNER




- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS

SIZE	90*90*76
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Surface / Pendant / Recessed
--------------	------------------------------

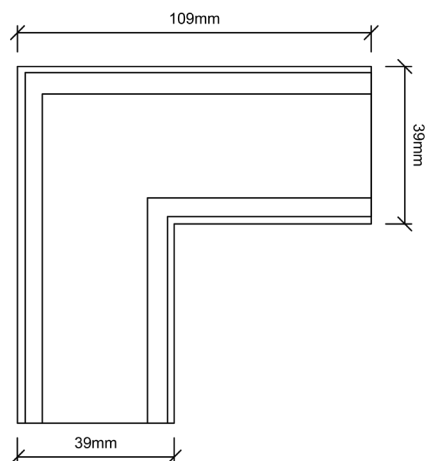


PRODUCTCODES

BLACK	WHITE
170-030*	170-031*

*Available from stock

INNER CORNER

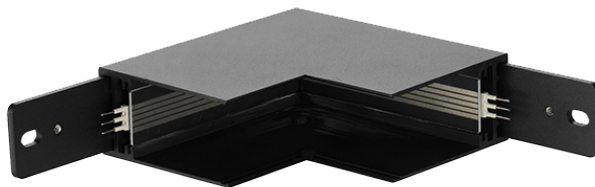


- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	123*123*76
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Surface / Pendant / Recessed
--------------	------------------------------

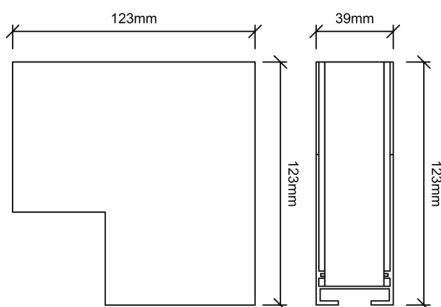

PRODUCTCODES

BLACK	WHITE
170-032*	170-033*

*Available from stock

OUTER CORNER




- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	123*123*76
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Surface / Pendant / Recessed
--------------	------------------------------

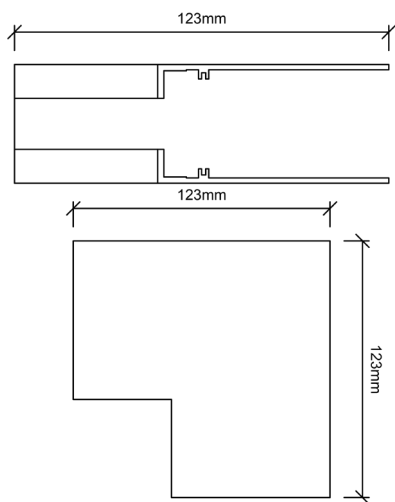

PRODUCTCODES

BLACK	WHITE
170-034*	170-035*

*Available from stock

45° CORNER

- CE certified
- 50.000 h
- 5 year warranty
- A-label




SPECIFICATIONS

SIZE	45°*110
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Surface / Pendant / Recessed
--------------	------------------------------

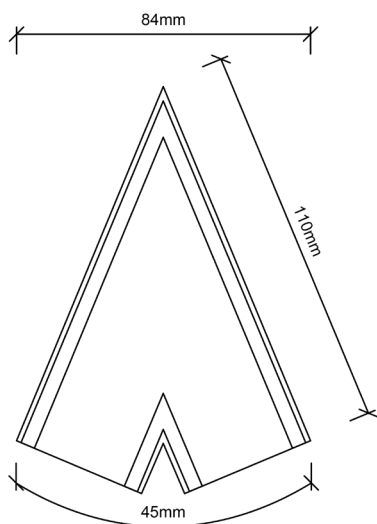


PRODUCTCODES

BLACK	WHITE
170-022*	170-023*

*Available from stock

T-CORNER

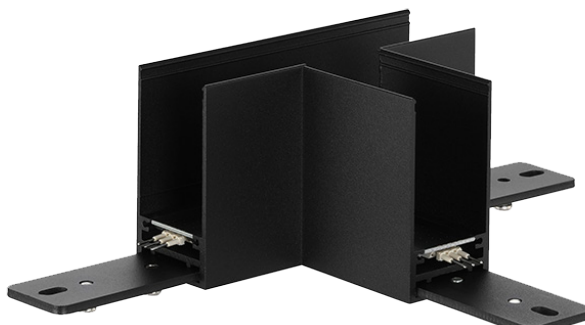


- Ⓒ CE certified
- ⌚ 50.000 h
- ✓ 5 year warranty
- Ⓐ A-label

SPECIFICATIONS

SIZE	129*99
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Surface / Pendant / Recessed
--------------	------------------------------

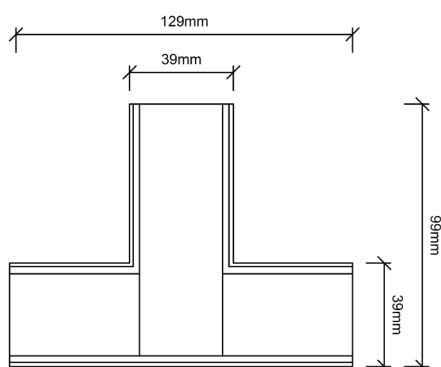


PRODUCTCODES

BLACK	WHITE
170-026*	170-027*

*Available from stock

L-CORNER RECESSED

- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

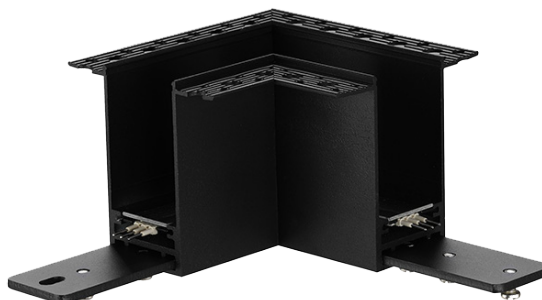


SPECIFICATIONS

SIZE	109*109*80
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Recessed
--------------	----------

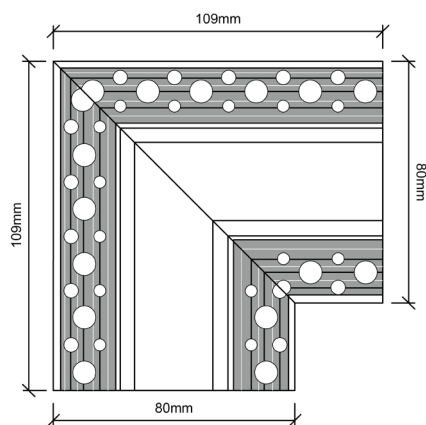

PRODUCTCODES

BLACK	WHITE
170-036*	170-037*

*Available from stock

INNER CORNER RECESSED




- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	123*123*76
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Recessed
--------------	----------

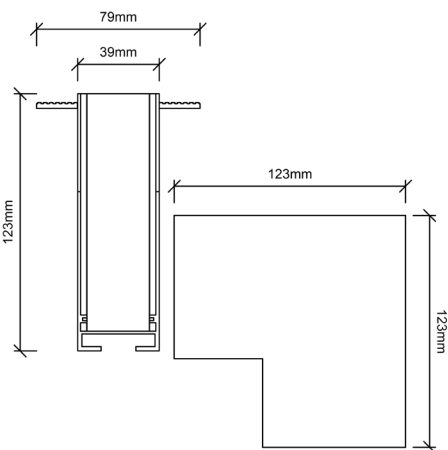


PRODUCTCODES

BLACK	WHITE
170-038*	170-039*

*Available from stock

OUTER CORNER RECESSED

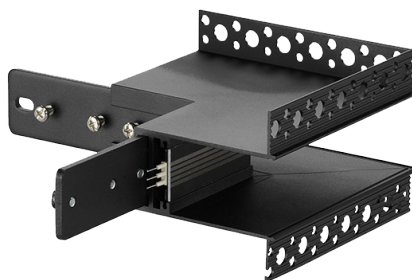


- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS

SIZE	123*123*76
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Recessed
--------------	----------

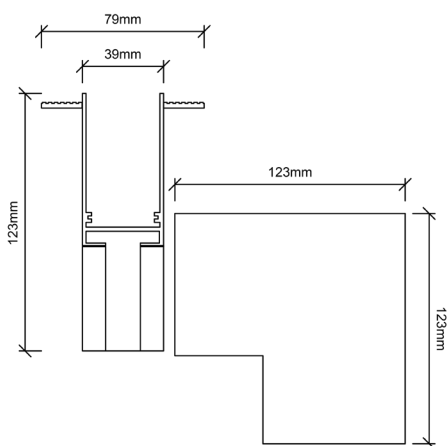


PRODUCTCODES

BLACK	WHITE
170-040*	170-041*

*Available from stock

T-CORNER RECESSED

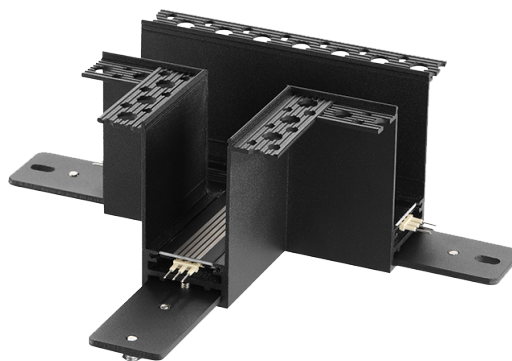


- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

SPECIFICATIONS

SIZE	129*121
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Recessed
--------------	----------

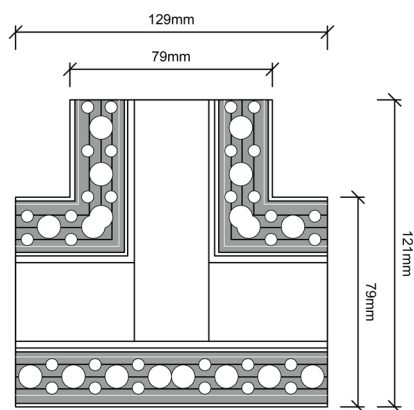

PRODUCTCODES

BLACK	WHITE
170-042*	170-043*

*Available from stock

RECESSED KIT

- CE certified
- 50.000 h
- 5 year warranty
- A-label




SPECIFICATIONS

SIZE	100*38*68
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Recessed kit for profile, one pair.
--------------	-------------------------------------

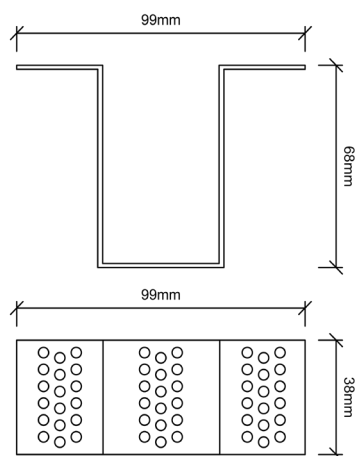

PRODUCTCODES

BLACK	WHITE
170-050*	170-051*

*Available from stock

TRACK CONNECTOR




- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	130*33*3
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Track profile connection
--------------	--------------------------

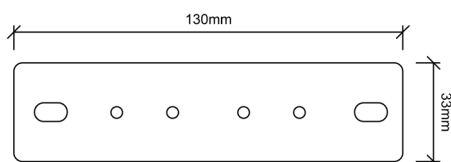

PRODUCTCODES

BLACK	WHITE
170-054*	170-055*

*Available from stock

POWER PLATE

- CE certified
- 50.000 h
- 5 year warranty
- A-label




SPECIFICATIONS

SIZE	65*40
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Electric connection, with 2 pins.
--------------	-----------------------------------

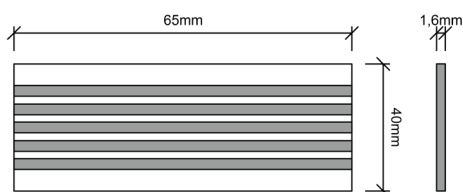


PRODUCTCODES

BLACK	WHITE
170-056*	170-057*

*Available from stock

DECORATIVE POWER PLATE

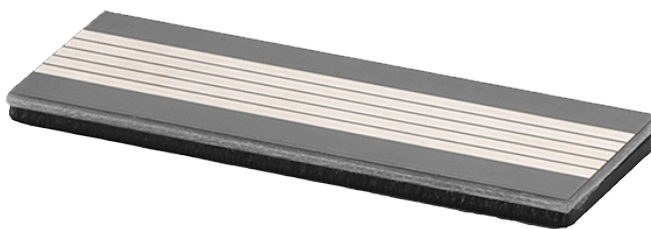


- CE CE certified
- 50.000 h
- ✓ 5 year warranty
- A A-label

SPECIFICATIONS

SIZE	65*40
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	For decoration use only
--------------	-------------------------

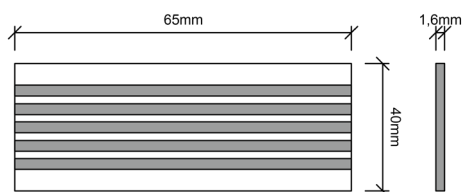

PRODUCTCODES

BLACK	WHITE
170-058*	170-059*

*Available from stock

END CAP



- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	76*39*1,5
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	End cap for magnetic track
--------------	----------------------------

PRODUCTCODES

BLACK	WHITE
170-060*	170-061*

*Available from stock

TRACK COVER



- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	100*38
HOUSING MATERIAL	PC
HOUSING COLORS	Opal white, transparency 65%

TECHNIC SPECS

INSTALLATION	Cover for magnetic track
--------------	--------------------------

PRODUCTCODES

OPAL WHITE
170-063*

*Available from stock

PIN 2



- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

HOUSING MATERIAL	Aluminium / PC
HOUSING COLORS	N/A

TECHNIC SPECS

INSTALLATION	Pin connector for electric connection
--------------	---------------------------------------

PRODUCTCODES

BLACK	WHITE
170-066*	170-066*

*Available from stock

INPUT TERMINAL

- CE certified
- 50.000 h
- 5 year warranty
- A-label




SPECIFICATIONS

SIZE	47*76*39
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Input terminal for magnetic track, includes pin connector, track connector and cable.
--------------	---

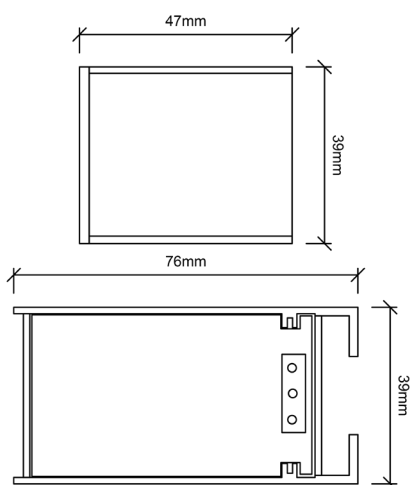

PRODUCTCODES

BLACK	WHITE
170-067*	170-068*

*Available from stock

NEW SURFACE MOUNTING KIT



- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

HOUSING MATERIAL	PC
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	New surface mounted for magnetic track
--------------	--

PRODUCTCODES

BLACK

1pc	170-069*
2pc	170-071*
4pc	170-073*

WHITE

1pc	170-070*
2pc	170-072*
4pc	170-074*

*Available from stock

DRIVER BOX



- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	280*125*60
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Without driver
--------------	----------------

PRODUCTCODES

BLACK	WHITE
170-064*	170-065*

*Available from stock

DRIVER BOX



- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	350*39*76
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	With 200W Meanwell driver. Can connected directly to the profile.
--------------	---

PRODUCTCODES

BLACK	WHITE
170-028*	170-029*

*Available from stock

X-CORNER




- CE CE certified
- 50.000 h
- ✓ 5 year warranty
- A A-label

SPECIFICATIONS

SIZE	129*159
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	Surface / Pendant / Recessed
--------------	------------------------------

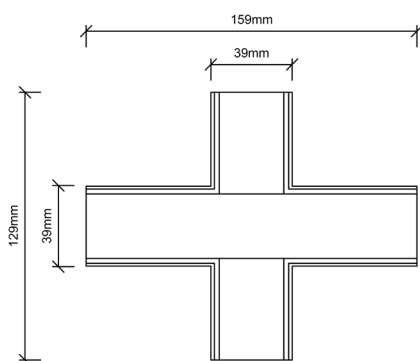

PRODUCTCODES

BLACK	WHITE
170-024*	170-025*

*Available from stock

DRIVER BOX TRIAC DIM 75W



- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	375*39*76
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	With 75W Driver. Can be connected directly to the profile. Standard connectable on one side, two side connectable driver box optionally available.
--------------	---

PRODUCTCODES

BLACK	WHITE
170-077*	170-078*

*Available from stock

DRIVER BOX TRIAC DIM 150W



- CE certified
- 50.000 h
- 5 year warranty
- A-label

SPECIFICATIONS

SIZE	454*39*76
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) / Sandy White (RAL9003)

TECHNIC SPECS

INSTALLATION	With 150W Driver. Can be connected directly to the profile. Standard connectable on one side, two side connectable driver box optionally available.
--------------	--


PRODUCTCODES

BLACK	WHITE
170-079*	170-080*

*Available from stock

JOGO

- CE CE certified
- 50.000 h
- 5 year warranty
- A A-label

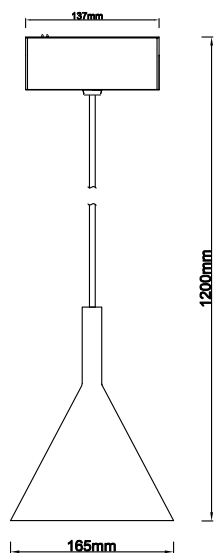

SPECIFICATIONS

SIZE	Ø165 13,7*120 cm
WEIGHT	088,kg
HOUSING MATERIAL	Aluminium
HOUSING COLORS	Sandy Black (RAL9005) Brass / Sandy White (RAL9003) Brass Sandy Black (RAL9005) Gold
ADJUSTABLE	No
IP RATE	IP20

TECHNIC SPECS

INPUT VOLTAGE	24V (48V optional)
POWER	10W
POWER FACTOR	0.9
DIMMING	24V (Independently Dali dimming optional)
CONNECTION	Magnetic

LICHT SPECS

LICHT SOURCE	Cree
LED TYPE	SMD
COLOR TEMPERATURE	2700K
BEAM ANGEL	65°
LUMEN	700 Lm
CRI	> 90

PRODUCTCODES

BLACK	2700K	WHITE	2700K
65°	170-941	65°	170-943